

08/19/98



jc605 U.S. PTO

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Sujeet Kumar et al.
Filed : Herewith
For : ALUMINUM OXIDE PARTICLES
Docket No.: N19.12-0016

jc408 U.S. PTO

09/136483



08/19/98

TRANSMITTAL LETTER

"Express Mail" mailing label number: EL024158096US
Date of Deposit: **August 19, 1998**

The following paper(s) and/or fee(s) are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" addressed to BOX PATENT APPLICATION, Assistant Commissioner for Patents, Washington, D.C. 20231:

1. Our checks in the amount of \$395.00 and \$40.00
2. Fee Calculation Sheet (in duplicate)
3. Patent Application comprising the following pages:
 - 1 Abstract
 - 31 Specification
 - 4 Claims
4. 8 Sheets of drawings
5. Executed Declaration and Power of Attorney (3 pages)
6. Executed Assignment (2 pages) and Recordation Form Cover Sheet(2 pages).
7. Verified Statement Claiming Small Entity Status

Respectfully submitted,


WESTMAN, CHAMPLIN & KELLY, P.A.

By:

Peter S. Dardi, Reg. No. 39,650
Suite 1600 - International Centre
900 Second Avenue South
Minneapolis, Minnesota 55402-3319
Phone: (612) 334-3222
Fax: (612) 334-3312

PSD:jlk

08/19/98



FEE CALCULATION SHEET

Attorney Docket No.

N19.12-0016

Sir:

Express Mail No. EL024158096US
Date of Deposit: August 19, 1998

The fees due for filing in the patent application of:

Inventor(s) : Sujeet Kumar, Hariklia Dris Reitz, Xiangxin Bi and Nobuyuki Kambe

Title : ALUMINUM OXIDE PARTICLES

Are calculated as follows:

☒ Reduced fees are applicable based on the enclosed Verified Statement claiming Small Entity status.

(Col. 1)		(Col. 2)	Small Entity		Large Entity		
FOR:	NO. FILED	NO. EXTRA	RATE	FEE	OR	RATE	FEE
BASIC FEE			=	\$395		=	\$790
TOTAL CLAIMS	20 - 20 =	* 0	X 11 =	\$0		X 22 =	\$0
INDEP CLAIMS	3 - 3 =	* 0	X 41 =	\$0		X 82 =	\$0
____ MULTIPLE DEPENDENT CLAIM PRESENTED			+ 135 =	\$0		+ 270 =	\$0
* If the difference in Col. 1 is less than zero, enter "0" in Col. 2.			TOTAL	\$395		TOTAL	\$0

Please charge Deposit Account No. 23-1123 in the amount of \$_____. This sheet is submitted in triplicate.

☒ A check in the amount of \$395.00 to cover the filing fee is enclosed.☒ The Commissioner is authorized to charge payment of any patent application processing or filing fees under 37 CFR §§ 1.16 and 1.17 or credit any overpayment to Deposit Account No. 23-1123. A duplicate copy of this sheet is enclosed.

Respectfully submitted,

WESTMAN, CHAMPLIN & KELLY, P.A.

By:

Peter S. Dardi, Reg. No. 39,650
 Suite 1600 - International Centre
 900 Second Avenue South
 Minneapolis, Minnesota 55402-3319
 Phone: (612) 334-3222 Fax: (612) 334-3312

PSD:jlk

VERIFIED STATEMENT CLAIMING
SMALL ENTITY STATUS
(SMALL BUSINESS CONCERN)

Attorney Docket No.

N19.12-0016

Inventor(s): HARIKUA ^{HW}
Sujeet Kumar, Haroula Dris Reitz, and Xiangxin Bi, and Nobuyuki Kambe

Title: ALUMINUM OXIDE PARTICLES

With respect to the invention described in

- ☒ the application filed herewith:
___ application Serial No. __, filed __:
___ Patent No. __, issued __:

I. IDENTIFICATION OF DECLARANT AND ANY RIGHTS AS A SMALL ENTITY

I am:

- ___ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN	<u>NanoGram Corporation</u>
ADDRESS OF CONCERN	<u>46774 Lakeview Boulevard, Fremont, California 94538</u>

The above-identified small business concern qualifies as a small business concern as defined in 13 CFR § 121.12, and reproduced in 37 CFR § 1.9(d), for purposes of paying reduced fees under 35 USC §§ 41(a) and (b).

II. OWNERSHIP OF INVENTION BY DECLARANT

Rights under contract or law remain with or have been conveyed to the above-identified concern. If the rights held are not exclusive, each individual, concern or organization having rights to the invention is listed below and no rights to the invention are held by any person who could not be classified as (1) an independent inventor under 37 CFR § 1.9(c) if that person had made the invention, (2) a small business concern under 37 CFR § 1.9(d) or (3) a non-profit organization under 37 CFR § 1.9(e).

- ☒ There is no such person, concern, or organization.
___ The person, concerns or organizations are listed below:

FULL NAME _____

ADDRESS _____

- ☐ Individual
☐ Small Business Concern
☐ Non-Profit Organization


III. ACKNOWLEDGEMENT OF DUTY TO NOTIFY PTO OF STATUS CHANGE

I acknowledge the duty to file, in this application or patent, notification of any change resulting in loss of entitlement to small entity status pursuant to 37 CFR § 1.28(b).

IV. DECLARATION

All statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

V. SIGNATURES

SIGNATURE  Date: 8/18/98
NAME OF PERSON SIGNING Nobuyuki Kambe
TITLE OF PERSON Vice President, Market Development
ADDRESS OF PERSON SIGNING 46774 Lakeview Boulevard
Fremont, CA 94538

Express Mail No. EL024158096US

PATENT APPLICATION OF
SUJEET KUMAR, HARIKLIA DRIS REITZ, XIANGXIN
BI, AND NOBUYUKI KAMBE
ENTITLED
ALUMINUM OXIDE PARTICLES

Docket No. N19.12-0016

ALUMINUM OXIDE PARTICLES

FIELD OF THE INVENTION

The invention relates to aluminum oxide particles having small particle diameters formed by laser pyrolysis. The invention further relates to methods of producing the aluminum oxide particles based on laser pyrolysis and polishing compositions including the aluminum oxide particles.

BACKGROUND OF THE INVENTION

Technological advances have increased the demand for improved material processing with strict tolerances on processing parameters. In particular, smooth surfaces are required in a variety of applications in electronics, tool production and many other industries. The substrates requiring polishing can involve hard materials such as semiconductors, ceramics, glass and metal. As miniaturization continues even further, even more precise polishing will be required. Current submicron technology requires polishing accuracy on a nanometer scale. Precise polishing technology can employ mechanochemical polishing involving a polishing composition that acts by way of a chemical interaction of the substrate with the polishing agents as well as an abrasive effective for mechanical smoothing of the surface.

SUMMARY OF THE INVENTION

In a first aspect, the invention pertains to a collection of particles comprising aluminum oxide. The collection of particle have an average diameter from about 5 nm to about 500 nm. Also, effectively no particles have a diameter greater than about four times the average diameter of the collection of particles. A

polishing composition can be formed from a dispersion of these aluminum oxide particles.

In another aspect, the invention pertains to a polishing composition including a dispersion of nanoscale aluminum oxide particles having an average diameter from about 5 nm to about 500 nm. The nanoparticles in the polishing composition preferably have effectively no particles with a diameter greater than about four times the average diameter of the particles.

In another aspect, the invention pertains to a method for producing a collection of aluminum oxide particles having an average diameter from about 5 nm to about 500 nm. The method includes pyrolyzing a molecular stream in a reaction chamber. The molecular stream includes an aluminum precursor, an oxidizing agent, and an infrared absorber. The pyrolysis is driven by heat absorbed from a laser beam.

In another aspect, the invention pertains to a collection of particles comprising aluminum oxide, the collection of particle having an average diameter from about 5 nm to about 500 nm. The collection of aluminum oxide particles have a distribution of particle sizes such that at least about 95 percent of the particles have a diameter greater than about 40 percent of the average diameter and less than about 160 percent of the average diameter.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic sectional view of a solid precursor delivery system taken through the center of the system.

Fig. 2 is a schematic, sectional view of an embodiment of a laser pyrolysis apparatus taken through the middle of the laser radiation path. The upper

insert is a bottom view of the injection nozzle, and the lower insert is a top view of the collection nozzle.

Fig. 3 is a schematic, perspective view of a reaction chamber of an alternative embodiment of the laser pyrolysis apparatus, where the materials of the chamber are depicted as transparent to reveal the interior of the apparatus.

Fig. 4 is a sectional view of the reaction chamber of Fig. 2 taken along line 3-3.

Fig. 5 is a schematic, sectional view of an oven for heating nanoparticle, in which the section is taken through the center of the quartz tube.

Fig. 6 is an x-ray diffractogram of aluminum oxide nanoparticles produced by laser pyrolysis.

Fig. 7 is a TEM micrograph of nanoparticles whose x-ray diffractogram is shown of Fig. 6.

Fig. 8 is a plot of the distribution of primary particle diameters for the nanoparticles shown in the TEM micrograph of Fig. 7.

Fig. 9 is an x-ray diffractogram of nanoparticles of aluminum oxide following heating in an oven.

Fig. 10 is a TEM micrograph of aluminum oxide nanoparticles following heat treatment in an oven.

Fig. 11 is a plot of the distribution of primary particle diameters for the nanoparticles shown in the TEM micrograph of Fig. 10.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Aluminum oxide (Al_2O_3) particles have been produced having primary particles with extremely small average diameters and a very narrow particle size distribution. Furthermore, the particle size distribution effectively does not have a tail so that there are no primary particles with diameters

significantly larger than the average. The particles have a roughly spherical morphology, although the particles generally are crystalline and can have a more specific shape reflecting the underlying crystal lattice.

Due to their extremely high uniformity in size and shape, these nanoscale aluminum oxide particles can be used to form improved abrasive compositions. Also, the aluminum oxide particles are highly pure and, in particular, lack metal contaminants. Abrasive compositions incorporating these particles are useful for polishing surfaces that have restrictive tolerance requirements with respect to smoothness. The small diameter of the particles along with the extremely high degree of uniformity of the particles make them particularly desirable for formulating abrasive or polishing compositions for planarization such as chemical-mechanical polishing.

To generate the desired nanoparticles, laser pyrolysis is used either alone or in combination with additional processing. Specifically, laser pyrolysis is an excellent process for efficiently producing suitable aluminum oxide particles with a narrow distribution of average particle diameters. In addition, nanoscale aluminum oxide particles produced by laser pyrolysis can be subjected to heating in an oxygen environment or an inert environment to alter and/or improve the properties of the particles.

A basic feature of successful application of laser pyrolysis for the production of aluminum oxide nanoparticles is the generation of a molecular stream containing an aluminum precursor compound, a radiation absorber and a reactant serving as an oxygen source. The molecular stream is pyrolyzed by an intense laser

beam. As the molecular stream leaves the laser beam, the particles are rapidly quenched.

A. Particle Production

5 Laser pyrolysis has been discovered to be a valuable tool for the production of nanoscale aluminum oxide particles. In addition, the particles produced by laser pyrolysis are a convenient material for further processing to expand the pathways for the production of desirable aluminum oxide particles. Thus, using laser
10 pyrolysis alone or in combination with additional processes, a wide variety of aluminum oxide particles can be produced.

The reaction conditions determine the qualities of the particles produced by laser pyrolysis.
15 The reaction conditions for laser pyrolysis can be controlled relatively precisely in order to produce particles with desired properties. The appropriate reaction conditions to produce a certain type of particles generally depend on the design of the
20 particular apparatus. Specific conditions used to produce aluminum oxide particles in a particular apparatus are described below in the Examples. Furthermore, some general observations on the relationship between reaction conditions and the
25 resulting particles can be made.

Increasing the laser power results in increased reaction temperatures in the reaction region as well as a faster quenching rate. A rapid quenching rate tends to favor production of high energy phases,
30 which may not be obtained with processes near thermal equilibrium. Similarly, increasing the chamber pressure also tends to favor the production of higher energy structures. Also, increasing the concentration of the reactant serving as the oxygen source in the reactant

stream favors the production of particles with increased amounts of oxygen.

Reactant gas flow rate and velocity of the reactant gas stream are inversely related to particle size so that increasing the reactant gas flow rate or velocity tends to result in smaller particle size. Also, the growth dynamics of the particles have a significant influence on the size of the resulting particles. In other words, different forms of a product compound have a tendency to form different size particles from other phases under relatively similar conditions. Laser power also influences particle size with increased laser power favoring larger particle formation for lower melting materials and smaller particle formation for higher melting materials.

Appropriate aluminum precursor compounds generally include aluminum compounds with reasonable vapor pressures, i.e., vapor pressures sufficient to get desired amounts of precursor vapor in the reactant stream. The vessel holding the precursor compounds can be heated to increase the vapor pressure of the aluminum precursor, if desired. Suitable liquid, aluminum precursors include, for example, aluminum s-butoxide ($\text{Al}(\text{OC}_4\text{H}_9)_3$).

A number of suitable solid, aluminum precursor compounds are available including, for example, aluminum chloride (AlCl_3), aluminum ethoxide ($\text{Al}(\text{OC}_2\text{H}_5)_3$), and aluminum isopropoxide ($\text{Al}[\text{OCH}(\text{CH}_3)_2]_3$). Solid precursors generally are heated to produce a sufficient vapor pressure. A suitable container for heating and delivering of a solid precursor to a laser pyrolysis apparatus is shown in Fig. 1.

Referring to Fig. 1, the solid precursor delivery system 50 includes a container 52 and a lid 54.

A gasket 56 is located between container 52 and lid 54. In one preferred embodiment, container 52 and lid 54 are made from stainless steel, and gasket 56 is made from copper. In this embodiment, lid 54 and gasket 56 are
5 bolted to container 52. Other inert materials, such as Pyrex®, suitable for the temperatures and pressures applied to the solid precursor system can be used. Container 52 is surrounded with a band heater 58, which is used to set the temperature of the delivery system 50
10 at desired values. Suitable band heaters are available from Omega Engineering Inc. Stamford, Conn. The temperature of the band heater can be adjusted to yield a desired vapor pressure of the precursor compound. Additional portions of the precursor delivery system can
15 be heated to maintain the precursor in a vapor state after it has left container 52.

Preferably, a thermocouple 60 is inserted into container 52 through lid 54. Thermocouple 60 can be inserted by way of a Swagelok® fitting 62 or other
20 suitable connection. Tubing 64 provides a flow input for a carrier gas into container 52. Tubing 64 preferably includes a shut off valve 66 and can be inserted through lid 54 by way of a Swagelok® fitting 68 or other suitable connection. Output tube 70 also
25 preferably includes a shut off valve 72. Output tube 70 preferably enters into container 52 through lid 54 at a sealed connection 74. Tubes 64 and 70 can be made of any suitable inert material such as stainless steel. A solid precursor can be placed directly within container
30 52 or it can be placed within a smaller, open container within container 52.

Preferred reactants serving as oxygen source include, for example, O₂, CO, CO₂, O₃ and mixtures thereof. The reactant compound from the oxygen source

should not react significantly with the aluminum precursor prior to entering the reaction zone since this generally would result in the formation of large particles.

5 Laser pyrolysis can be performed with a variety of optical laser frequencies. Preferred lasers operate in the infrared portion of the electromagnetic spectrum. CO₂ lasers are particularly preferred sources of laser light. Infrared absorbers for inclusion in the
10 molecular stream include, for example, C₂H₄, NH₃, SF₆, SiH₄ and O₃. O₃ can act as both an infrared absorber and as an oxygen source. The radiation absorber, such as the infrared absorber, absorbs energy from the radiation beam and distributes the energy to the other reactants
15 to drive the pyrolysis.

 Preferably, the energy absorbed from the radiation beam increases the temperature at a tremendous rate, many times the rate that energy generally would be produced even by strongly exothermic reactions under
20 controlled condition. While the process generally involves nonequilibrium conditions, the temperature can be described approximately based on the energy in the absorbing region. The laser pyrolysis process is qualitatively different from the process in a combustion
25 reactor where an energy source initiates a reaction, but the reaction is driven by energy given off by an exothermic reaction.

 An inert shielding gas can be used to reduce the amount of reactant and product molecules contacting
30 the reactant chamber components. Appropriate shielding gases include, for example, Ar, He and N₂.

 An appropriate laser pyrolysis apparatus generally includes a reaction chamber isolated from the ambient environment. A reactant inlet connected to a

reactant supply system produces a molecular stream through the reaction chamber. A laser beam path intersects the molecular stream at a reaction zone. The molecular stream continues after the reaction zone to an outlet, where the molecular stream exits the reaction chamber and passes into a collection system. Generally, the laser is located external to the reaction chamber, and the laser beam enters the reaction chamber through an appropriate window.

Referring to Fig. 2, a particular embodiment 100 of a pyrolysis apparatus involves a reactant supply system 102, reaction chamber 104, collection system 106 and laser 108. Reactant supply system 102 includes a source 120 of precursor compound. For liquid or solid precursors, a carrier gas from carrier gas source 122 can be introduced into precursor source 120, containing the precursor to facilitate delivery of the precursor. Precursor source 120 can be a solid precursor delivery system 50, as shown in Fig. 1. The carrier gas from source 122 preferably is either an infrared absorber or an inert gas and is preferably bubbled through a liquid, precursor compound or delivered into a solid precursor delivery system. The quantity of precursor vapor in the reaction zone is roughly proportional to the flow rate of the carrier gas.

Alternatively, carrier gas can be supplied directly from infrared absorber source 124 or inert gas source 126, as appropriate. The reactant providing the oxygen is supplied from reactant source 128, which can be a gas cylinder or other suitable container. The gases from the precursor source 120 are mixed with gases from reactant source 128, infrared absorber source 124 and inert gas source 126 by combining the gases in a single portion of tubing 130. The gases are combined a

5
10

15
20

25

30

inches and a width along the radial direction from about 1/8 in to about 1/16 in. The flow of shielding gas through annular opening 204 helps to prevent the spread of the reactant gases and product particles throughout reaction chamber 104. Injection nozzle 202 can be heated to keep the precursor compound in the vapor state.

Tubular sections 208, 210 are located on either side of injection nozzle 202. Tubular sections 208, 210 include ZnSe windows 212, 214, respectively. Windows 212, 214 are about 1 inch in diameter. Windows 212, 214 are preferably cylindrical lenses with a focal length equal to the distance between the center of the chamber to the surface of the lens to focus the beam to a point just below the center of the nozzle opening. Windows 212, 214 preferably have an antireflective coating. Appropriate ZnSe lenses are available from Janos Technology, Townshend, Vermont. Tubular sections 208, 210 provide for the displacement of windows 212, 214 away from main chamber 200 such that windows 212, 214 are less likely to be contaminated by reactants or products. Window 212, 214 are displaced, for example, about 3 cm from the edge of the main chamber 200.

Windows 212, 214 are sealed with a rubber o-ring to tubular sections 208, 210 to prevent the flow of ambient air into reaction chamber 104. Tubular inlets 216, 218 provide for the flow of shielding gas into tubular sections 208, 210 to reduce the contamination of windows 212, 214. Tubular inlets 216, 218 are connected to inert gas source 138 or to a separate inert gas source. In either case, flow to inlets 216, 218 preferably is controlled by a mass flow controller 220.

Laser 108 is aligned to generate a laser beam 222 that enters window 212 and exits window 214.

Windows 212, 214 define a laser light path through main chamber 200 intersecting the flow of reactants at reaction zone 224. After exiting window 214, laser beam 222 strikes power meter 226, which also acts as a beam
5 dump. An appropriate power meter is available from Coherent Inc., Santa Clara, CA. Laser 108 can be replaced with an intense conventional light source such as an arc lamp. Preferably, laser 108 is an infrared laser, especially a CW CO₂ laser such as an 1800 watt
10 maximum power output laser available from PRC Corp., Landing, NJ.

Reactants passing through slit 206 in injection nozzle 202 initiate a molecular stream. The molecular stream passes through reaction zone 224, where
15 reaction involving the aluminum precursor compound takes place. Heating of the gases in reaction zone 224 is extremely rapid, roughly on the order of 10⁵ degree C/sec depending on the specific conditions. The reaction is rapidly quenched upon leaving reaction zone
20 224, and particles 228 are formed in the molecular stream. The nonequilibrium nature of the process allows for the production of nanoparticles with a highly uniform size distribution and structural homogeneity.

The path of the molecular stream continues to
25 collection nozzle 230. Collection nozzle 230 is spaced about 2 cm from injection nozzle 202. The small spacing between injection nozzle 202 and collection nozzle 230 helps reduce the contamination of reaction chamber 104 with reactants and products. Collection nozzle 230 has
30 a circular opening 232. Circular opening 232 feeds into collection system 106.

The chamber pressure is monitored with a pressure gauge attached to the main chamber. The preferred chamber pressure for the production of the

desired oxides generally ranges from about 80 Torr to about 500 Torr.

Reaction chamber 104 has two additional tubular sections not shown. One of the additional tubular sections projects into the plane of the sectional view in Fig. 2, and the second additional tubular section projects out of the plane of the sectional view in Fig. 2. When viewed from above, the four tubular sections are distributed roughly, symmetrically around the center of the chamber. These additional tubular sections have windows for observing the inside of the chamber. In this configuration of the apparatus, the two additional tubular sections are not used to facilitate production of particles.

Collection system 106 can include a curved channel 250 leading from collection nozzle 230. Because of the small size of the particles, the product particles follow the flow of the gas around curves. Collection system 106 includes a filter 252 within the gas flow to collect the product particles. A variety of materials such as Teflon, glass fibers and the like can be used for the filter as long as the material is inert and has a fine enough mesh to trap the particles. Preferred materials for the filter include, for example, a glass fiber filter from ACE Glass Inc., Vineland, NJ and cylindrical polypropylene filters from Cole-Parmer Instrument Co., Vernon Hills, IL.

Pump 254 is used to maintain collection system 106 at a selected pressure. A variety of different pumps can be used. Appropriate pumps for use as pump 254 include, for example, Busch Model B0024 pump from Busch, Inc., Virginia Beach, VA with a pumping capacity of about 25 cubic feet per minute (cfm) and Leybold Model SV300 pump from Leybold Vacuum Products, Export,

PA with a pumping capacity of about 195 cfm. It may be desirable to flow the exhaust of the pump through a scrubber 256 to remove any remaining reactive chemicals before venting into the atmosphere. The entire
5 apparatus 100 can be placed in a fume hood for ventilation purposes and for safety considerations. Generally, the laser remains outside of the fume hood because of its large size.

The apparatus is controlled by a computer.
10 Generally, the computer controls the laser and monitors the pressure in the reaction chamber. The computer can be used to control the flow of reactants and/or the shielding gas. The pumping rate is controlled by either a manual needle valve or an automatic throttle valve
15 inserted between pump 254 and filter 252. As the chamber pressure increases due to the accumulation of particles on filter 252, the manual valve or the throttle valve can be adjusted to maintain the pumping rate and the corresponding chamber pressure.

20 The reaction can be continued until sufficient particles are collected on filter 252 such that the pump can no longer maintain the desired pressure in the reaction chamber 104 against the resistance through filter 252. When the pressure in reaction chamber 104
25 can no longer be maintained at the desired value, the reaction is stopped, and the filter 252 is removed. With this embodiment, about 1-90 grams of particles can be collected in a single run before the chamber pressure can no longer be maintained. A single run generally can
30 last up to about 6 hours depending on the type of particle being produced and the type of filter being used. Therefore, it is straightforward to produce a macroscopic quantity of particles, i.e., a quantity visible with the naked eye.

The reaction conditions can be controlled relatively precisely. The mass flow controllers are quite accurate. The laser generally has about 0.5 percent power stability. With either a manual control
5 or a throttle valve, the chamber pressure can be controlled to within about 1 percent.

The configuration of the reactant supply system 102 and the collection system 106 can be reversed. In this alternative configuration, the
10 reactants are supplied from the bottom of the reaction chamber, and the product particles are collected from the top of the chamber. This alternative configuration can result in a slightly higher collection of product since aluminum oxide particles tend to be buoyant in the
15 surrounding gases. In this configuration, it is preferable to include a curved section in the collection system so that the collection filter is not mounted directly above the reaction chamber.

An alternative design of a laser pyrolysis
20 apparatus has been described. See, copending and commonly assigned U.S. Patent Application No. 08/808,850, entitled "Efficient Production of Particles by Chemical Reaction," incorporated herein by reference. This alternative design is intended to facilitate
25 production of commercial quantities of particles by laser pyrolysis. A variety of configurations are described for injecting the reactant materials into the reaction chamber.

The alternative apparatus includes a reaction
30 chamber designed to minimize contamination of the walls of the chamber with particles, to increase the production capacity and to make efficient use of resources. To accomplish these objectives, the reaction chamber conforms generally to the shape of an elongated

reactant inlet, decreasing the dead volume outside of the molecular stream. Gases can accumulate in the dead volume, increasing the amount of wasted radiation through scattering or absorption by nonreacting molecules. Also, due to reduced gas flow in the dead volume, particles can accumulate in the dead volume causing chamber contamination.

The design of the improved reaction chamber 300 is schematically shown in Figs. 3 and 4. A reactant gas channel 302 is located within block 304. Facets 306 of block 304 form a portion of conduits 308. Another portion of conduits 308 join at edge 310 with an inner surface of main chamber 312. Conduits 308 terminate at shielding gas inlets 314. Block 304 can be repositioned or replaced, depending on the reaction and desired conditions, to vary the relationship between the elongated reactant inlet 316 and shielding gas inlets 314. The shielding gases from shielding gas inlets 314 form blankets around the molecular stream originating from reactant inlet 316.

The dimensions of elongated reactant inlet 316 preferably are designed for high efficiency particle production. Reasonable dimensions for the reactant inlet for the production of the aluminum oxide particles, when used with a 1800 watt CO₂ laser, are from about 5 mm to about 1 meter.

Main chamber 312 conforms generally to the shape of elongated reactant inlet 316. Main chamber 312 includes an outlet 318 along the molecular stream for removal of particulate products, any unreacted gases and inert gases. Tubular sections 320, 322 extend from the main chamber 312. Tubular sections 320, 322 hold windows 324, 326 to define a laser beam path 328 through the reaction chamber 300. Tubular sections 320, 322 can

include shielding gas inlets 330, 332 for the introduction of shielding gas into tubular sections 320, 322.

5 The improved apparatus includes a collection system to remove the particles from the molecular stream. The collection system can be designed to collect a large quantity of particles without terminating production or, preferably, to run in continuous production by switching between different
10 particle collectors within the collection system. The collection system can include curved components within the flow path similar to curved portion of the collection system shown in Fig. 1. The configuration of the reactant injection components and the collection
15 system can be reversed such that the particles are collected at the top of the apparatus.

As noted above, properties of the product particles can be modified by further processing. In particular, aluminum oxide nanoscale particles can be
20 heated in an oven in an oxidizing environment or an inert environment to alter the oxygen content, to change the crystal lattice, or to remove adsorbed compounds on the particles to improve the quality of the particles.

The use of sufficiently mild conditions, i.e.,
25 temperatures well below the melting point of the particles, results in modification of the aluminum oxide particles without significantly sintering the particles into larger particles. The processing of metal oxide nanoscale particles in an oven is discussed in copending
30 and commonly assigned, U.S. Patent Application Ser. No. 08/897,903, filed July 21, 1997, entitled "Processing of Vanadium Oxide Particles With Heat," incorporated herein by reference.

A variety of apparatuses can be used to perform the heat processing. An example of an apparatus 400 to perform this processing is displayed in Fig. 5. Apparatus 400 includes a tube 402 into which the
5 particles are placed. Tube 402 is connected to a reactant gas source 404 and inert gas source 406. Reactant gas, inert gas or a combination thereof are placed within tube 402 to produce the desired atmosphere.

10 Preferably, the desired gases are flowed through tube 402. Appropriate reactant gases to produce an oxidizing environment include, for example, O_2 , O_3 , CO, CO_2 and combinations thereof. The reactant gas can be diluted with inert gases such as Ar, He and N_2 . The
15 gases in tube 402 can be exclusively inert gases if an inert atmosphere is desired. The reactant gases may not result in changes to the stoichiometry of the particles being heated.

Tube 402 is located within oven or furnace
20 408. Oven 408 maintains the relevant portions of the tube at a relatively constant temperature, although the temperature can be varied systematically through the processing step, if desired. Temperature in oven 408 generally is measured with a thermocouple 410. The
25 aluminum oxide particles can be placed in tube 402 within a vial 412. Vial 412 prevents loss of the particles due to gas flow. Vial 412 generally is oriented with the open end directed toward the direction of the source of the gas flow.

30 The precise conditions including type of oxidizing gas (if any), concentration of oxidizing gas, pressure or flow rate of gas, temperature and processing time can be selected to produce the desired type of product material. The temperatures generally are mild,

i.e., significantly below the melting point of the material. The use of mild conditions avoids interparticle sintering resulting in larger particle sizes. Some controlled sintering of the particles can
5 be performed in oven 408 at somewhat higher temperatures to produce slightly larger, average particle diameters.

For the processing of aluminum oxide, for example, the temperatures preferably range from about 50°C to about 1200°C and more preferably from about 50°C
10 to about 800°C. The particles preferably are heated for about 1 hour to about 100 hours. Some empirical adjustment may be required to produce the conditions appropriate for yielding a desired material.

B. Particle Properties

15 A collection of particles of interest generally has an average diameter for the primary particles of less than about 500 nm, preferably from about 5 nm to about 100 nm, more preferably from about 5 nm to about 25 nm. The primary particles usually have
20 a roughly spherical gross appearance. Upon closer examination, the aluminum oxide particles generally have facets corresponding to the underlying crystal lattice. Nevertheless, the primary particles tend to exhibit growth that is roughly equal in the three physical
25 dimensions to give a gross spherical appearance. Generally, 95 percent of the primary particles, and preferably 99 percent, have ratios of the dimension along the major axis to the dimension along the minor axis less than about 2. Diameter measurements on
30 particles with asymmetries are based on an average of length measurements along the principle axes of the particle.

Because of their small size, the primary particles tend to form loose agglomerates due to van der

Waals and other electromagnetic forces between nearby particles. Nevertheless, the nanometer scale of the primary particles is clearly observable in transmission electron micrographs of the particles. The particles
5 generally have a surface area corresponding to particles on a nanometer scale as observed in the micrographs. Furthermore, the particles can manifest unique properties due to their small size and large surface area per weight of material. For example, TiO_2
10 nanoparticles generally exhibit altered absorption properties based on their small size, as described in copending and commonly assigned U.S. Patent Application Serial No. 08/962,515, entitled "Ultraviolet Light Block and Photocatalytic Materials," incorporated herein by
15 reference.

The primary particles preferably have a high degree of uniformity in size. As determined from examination of transmission electron micrographs, the primary particles generally have a distribution in sizes
20 such that at least about 95 percent, and preferably 99 percent, of the primary particles have a diameter greater than about 40 percent of the average diameter and less than about 160 percent of the average diameter. Preferably, the primary particles have a distribution of
25 diameters such that at least about 95 percent of the primary particles have a diameter greater than about 60 percent of the average diameter and less than about 140 percent of the average diameter.

Furthermore, essentially no primary particles
30 have an average diameter greater than about 4 times the average diameter and preferably 3 times the average diameter, and more preferably 2 times the average diameter. In other words, the particle size distribution effectively does not have a tail indicative

of a small number of particles with significantly larger sizes. This is a result of the small reaction region and corresponding rapid quench of the particles. An effective cut off in the tail indicates that there are
5 less than about 1 particle in 10^6 have a diameter greater than a particular cut off value above the average diameter. The narrow size distributions, lack of a tail in the distributions and the roughly spherical morphology can be exploited in a variety of
10 applications, especially for abrasive applications.

In addition, the nanoparticles generally have a very high purity level. The crystalline aluminum oxide nanoparticles produced by the above described methods are expected to have a purity greater than the
15 reactant gases because the crystal formation process tends to exclude contaminants from the lattice. Furthermore, crystalline aluminum oxide particles produced by laser pyrolysis have a high degree of crystallinity.

20 Aluminum oxide is known to exist in several crystalline phases including α - Al_2O_3 , δ - Al_2O_3 , γ - Al_2O_3 , ϵ - Al_2O_3 , θ - Al_2O_3 , and η - Al_2O_3 . The delta phase has a tetragonal crystal structure, and the gamma phase has a cubic crystal structure. Although under certain
25 conditions mixed phase materials are formed, laser pyrolysis generally can be used effectively to produce single phase crystalline particles. The conditions of the laser pyrolysis can be varied to favor the formation of a single, selected phase of crystalline Al_2O_3 .

30 Amorphous aluminum oxide can also be formed. Conditions favoring the formation of amorphous particles include, for example, high pressures, high flow rates, high laser power and combinations thereof.

C. Polishing Compositions

A variety of polishing compositions can advantageously incorporate nanoscale aluminum oxide particles, including compositions for performing chemical-mechanical polishing. The aluminum oxide particles can function as abrasive particles. In its simplest form, the polishing composition can just involve the abrasive, aluminum oxide particles, produced as described above. More preferably, the abrasive particles are dispersed in an aqueous or nonaqueous solution. The solution generally includes a solvent such as water, alcohol, acetone or the like. A surfactant can be added to add with dispersion, if desired. The abrasive particles should not be significantly soluble in the solvent. The polishing composition generally includes from about 0.05 percent to about 30 percent, and preferably from about 1.0 percent to about 10 percent by weight aluminum oxide particles. The selected composition of the slurry generally depends on the substrate being processed and the eventual use for that substrate. In particular, aluminum oxide particles are useful in slurries to polish metal materials including, for example, copper and tungsten wires and films.

Preferred polishing compositions have both a chemical and mechanical effect on a substrate. Thus, they are useful in chemical-mechanical polishing (CMP). In particular, for the polishing of semiconducting materials, oxides of semiconductor materials, or ceramic substrates for the production of integrated circuits, colloidal silica can have both a chemical and/or a mechanical effect on relevant substrates. Thus, some preferred embodiments include in a solution both an abrasive, such as aluminum oxide nanoparticles, and colloidal silica.

SECRET
The formation of colloidal silica involves formation of an aqueous solution of hydrated silicon oxides. The colloidal silica solution preferably includes from about 0.05 percent to about 50 percent, 5 and preferably from about 1.0 percent to about 20 percent by weight silica. The use of colloidal silica for polishing hard substrates is described in U.S. Patent No. 5,228,886, "Mechanochemical Polishing Abrasive," incorporated herein by reference, and in U.S. 10 Patent No. 4,011,099, entitled "Preparation of Damage-Free Surface on Alpha-Alumina," incorporated herein by reference. Colloidal silica has been suggested to chemically react with certain surfaces.

While conventional silica can be used to form 15 the colloidal silica, silica particles produced by laser pyrolysis with or without additional heating are ideally suited for the production of colloidal silica. The production of nanoscale silica by laser pyrolysis is described in commonly assigned and copending U.S. Patent 20 Application 09/085,514, entitled "Silicon Oxide Particles," incorporated herein by reference.

The solvents used in the formation of the polishing compositions preferably have a low level of contaminants. In particular, water used as a solvent 25 should be deionized and/or distilled. The polishing composition preferably is free from any contaminants, i.e., any composition not included for effectuating the polishing process. In particular, the polishing composition preferably is free of soluble metal 30 contaminants such as potassium and sodium salts. Preferably, the compositions contain less than about 0.001 percent and more preferably, less than about 0.0001 percent by weight metal. Furthermore, the polishing composition preferably is free from

particulate contaminants, which are not soluble in the solvent.

The polishing compositions can include other components to assist with the polishing process. For example, the polishing composition can include additional abrasive particles combined with the aluminum oxide. Suitable abrasive particles are described, for example, in copending and commonly assigned U.S. patent application serial No. 08/961,735, entitled "Abrasive Particles for Surface Polishing," incorporated herein by reference, and in U.S. Patent 5,228,886, supra. When using additional (non-aluminum oxide) abrasive particles, the polishing composition preferably includes from about 0.05 to about 10 percent additional abrasive particles.

Suitable additional abrasive particles other than aluminum oxide particles include, for example, silicon carbide, metal oxides, metal sulfides and metal carbides with average diameters less than about 100 nm and more preferably from about 5 nm to about 50 nm. In particular, preferred additional abrasive particles include compounds such as SiC, TiO₂, Fe₂O₃, Fe₃O₄, Fe₃C, Fe₇C₃, MoS₂, MoO₂, WC, WO₃, and WS₂. Also, preferred abrasive particles have a relatively narrow diameter distribution and an effective cut off of particle diameters at a value that is several times larger than the average diameter.

The particular composition of abrasive particles should be selected such that the particles have an appropriate hardness for the surface to be polished as well as an appropriate distribution of diameters to obtain efficiently the desired smoothness. Aluminum oxide is very hard. Thus, aluminum oxide is particularly suitable for the polishing of hard

substrates. Abrasive particles that are hard can result in undesired scratches in the surface of soft substrates.

5 The polishing composition can be acidic or basic to improve the polishing characteristics. For polishing metals an acidic pH generally is preferred, for example, in the range from about 3.0 to about 4.0. A variety of acids can be used such as glacial acetic acid. For polishing oxide surfaces a basic polishing
10 composition can be used, for example, with a pH from about 9.0 to about 11. To form a basic polishing composition, KOH or other bases can be added. Also, an oxidizing agent such as H_2O_2 can be added, especially for polishing metals.

15 The composition of the abrasive particles should also provide for removal of the polishing compositions after completion of the polishing. One approach to cleaning polished surfaces involves dissolving the abrasive particles with a cleaning
20 solution that does not damage the polished surface. The removal of an alumina based polishing compositions using a cleaning composition with phosphoric acid is described in U.S. Patent 5,389,194, entitled "Methods of Cleaning Semiconductor Substrates After Polishing," incorporated
25 herein by reference. This patent also contains a general description of polishing with slurries containing conventional aluminum oxides.

30 The polishing compositions can be used for mechanical or chemical-mechanical polishing that is performed manually or using a powered polishing machine. In either case, the polishing composition is generally applied to a polishing pad or cloth to perform the polishing. Any of a variety of mechanical polishers can

be used, for example, vibratory polishers and rotary polishers.

The polishing compositions are particularly useful for the polishing of substrate surfaces for the production of integrated circuits. As the density of integrated circuits on a single surface increases, the tolerances for smoothness of the corresponding substrates become more stringent. Therefore, it is important that polishing process is able to remove small surface discontinuities prior to applying circuit patterns onto the substrate. The small size and uniformity of the abrasive particles disclosed herein are particularly suitable in polishing compositions for these applications. Al_2O_3 particles with or without colloidal silica are suitable for the polishing of silicon based semiconductor substrates. Similarly, layered structures involving patterned portions of insulating layers and conducting layers can be simultaneously planarized, as described in U.S. Patent No. 4,956,313, incorporated herein by reference.

EXAMPLES

Example 1 - Laser Pyrolysis for Formation of Al_2O_3 Nanoparticles

The synthesis of aluminum oxide particles described in this example was performed by laser pyrolysis. The particles were produced using essentially the laser pyrolysis apparatus of Fig. 2, described above, using the solid precursor delivery system shown schematically in Fig. 1.

The aluminum chloride (Strem Chemical, Inc., Newburyport, MA) precursor vapor was carried into the reaction chamber by flowing Ar gas through the solid precursor delivery system containing AlCl_3 . The precursor was heated to a temperature as indicated in

Table 1. C₂H₄ gas was used as a laser absorbing gas, and Argon was used as an inert gas. The reaction gas mixture containing AlCl₃, Ar, O₂ and C₂H₄ was introduced into the reactant gas nozzle for injection into the reaction chamber. The reactant gas nozzle had an opening with dimensions of 5/8 in. x 1/8 in. Additional parameters of the laser pyrolysis synthesis relating to the particles of Example 1 are specified in Table 1.

TABLE 1

10

15

20

25

30

Sample	1
Crystal Structure	γ-Al ₂ O ₃ (cubic)
Pressure (Torr)	120
Argon - Win. (sccm)	700
Argon - Sld. (slm)	2.8
Ethylene (sccm)	725
Carrier Gas (sccm)	705 (Ar)
Oxygen (sccm)	552
Laser Output (watts)	600
Precursor Temperature (°C)	260

sccm = standard cubic centimeters per minute

slm = standard liters per minute

Argon - Win. = argon flow through inlets 216, 218

Argon - Sld. = argon flow through annular channel 142.

The production rate of aluminum oxide particles was typically about 4 g/hr. To evaluate the atomic arrangement, the samples were examined by x-ray diffraction using the Cu(K α) radiation line on a Siemens
5 D500 x-ray diffractometer. An x-ray diffractogram for a sample produced under the conditions specified in Table 1 is shown in Fig. 6. Under the set of conditions specified in Table 1, the particles had an x-ray diffractogram corresponding to γ -Al₂O₃ (cubic) although
10 the diffractogram contained a considerable amount of noise.

Transmission electron microscopy (TEM) was used to determine particle sizes and morphology. A TEM micrograph for the particles produced under the
15 conditions of Table 1 is displayed in Fig. 7. An examination of a portion of the TEM micrograph yielded an average particle size of about 7 nm. The corresponding particle size distribution is shown in Fig. 8. The approximate size distribution was
20 determined by manually measuring diameters of the particles distinctly visible in the micrograph of Fig. 7. Only those particles having clear particle boundaries were measured to avoid regions distorted or out of focus in the micrograph. Measurements so
25 obtained should be more accurate and are not biased

since a single view cannot show a clear view of all particles. It is significant that the particles span a rather narrow range of sizes.

The particles produced by laser pyrolysis had a dark color, evidently due to the presence of carbon associated with the particles. The carbon can come from the ethylene used as the laser absorbing gas. The dark color was removed by heating as described in Example 2. The production of carbon coated nanoparticles is described further in copending and commonly assigned patent application serial no. __/__,__, entitled "Metal (Silicon) Oxide/Carbon Composite Particles," filed on July 22, 1998, incorporated herein by reference.

Example 2 - Oven Processed

A sample of aluminum oxide nanoparticles produced by laser pyrolysis according to the conditions specified in Table 1 were heated in an oven under oxidizing conditions. The oven was essentially as described above with respect to Fig. 5. The samples were heated in the oven at about 500°C for about 2 hours. Oxygen gas was flowed through a 1.0 in diameter quartz tube at a flow rate of about 250 sccm. Between about 100 and about 300 mg of nanoparticles were placed in an open 1 cc vial within the quartz tube projecting

through the oven. After heating, the particles had a white color. The resulting particles were γ - Al_2O_3 as determined by x-ray diffraction. The x-ray diffractogram is shown in Fig. 9. The diffractogram in Fig. 9 has a higher signal-to-noise ratio than the diffraction gram in Fig. 6. This improvement in signal-to-noise may be due to an increased level of crystallinity.

A TEM micrograph for the heat treated Al_2O_3 nanoparticles is shown in Fig. 10. The corresponding particle size distribution is shown in Fig. 11. The particle size distribution was produced following the same procedures as used to produce the distribution in Fig. 8.

Example 3 - Slurries of Aluminum Oxide Nanoparticles

This example includes a description of the preparation of a slurry with about 1 percent by weight aluminum oxide nanoparticles.

A 5 ml quantity of deionized water was placed in a Waring® blender. The blender was set on a slow setting, and 0.1000g of Al_2O_3 nanoparticles made by laser pyrolysis was added to the blender. Following addition of the dry powder, 2 ml of deionized water was added as a rinse. The pH of the concentrated slurry was adjusted by the addition of 0.2 ml of approximately 2

percent by weight HCl. After addition of the HCl, the
blender speed setting was increased to medium-high for
30 seconds and then lowered again to the slow setting.
The concentrated slurry was diluted with enough water to
5 form 10 ml total liquid content. After the addition of
the additional water, the blender speed was again
increased to medium-high for 30 seconds. Then, the
mixer was stopped. The pH of the resulting slurry was
about 3. The resulting slurry had a color that was
10 either milky if heat treated samples were used, or a
coffee color if particles that were not heat treated
were used. The slurries were each placed in a sealed
bottle.

The embodiments described above are intended
15 to be representative and not limiting. Additional
embodiments of the invention are within the claims.
Although the present invention has been described with
reference to preferred embodiments, workers skilled in
the art will recognize that changes may be made in form
20 and detail without departing from the spirit and scope
of the invention.

WHAT IS CLAIMED IS:

1. A collection of particles comprising aluminum oxide, the collection of particle having an average diameter from about 5 nm to about 500 nm and effectively no particles have a diameter greater than about four times the average diameter of the collection of particles.
2. The collection of particles of claim 1 wherein the collection of particles have an average diameter from about 5 nm to about 25 nm.
3. The collection of particles of claim 1 wherein the aluminum oxide has a crystalline structure of γ - Al_2O_3 .
4. The collection of particles of claim 1 wherein the collection of particles includes effectively no particles with a diameter greater than about three times the average diameter.
5. The collection of particles of claim 1 wherein the collection of particles includes effectively no particles with a diameter greater than about two times the average diameter.
6. The collection of particles of claim 1 wherein the collection of particles have a distribution of particle sizes such that at least about 95 percent of the particles have a diameter greater than about 40

percent of the average diameter and less than about 160 percent of the average diameter.

7. The collection of particles of claim 1 wherein the collection of particles have a distribution of particle sizes such that at least about 95 percent of the particles have a diameter greater than about 60 percent of the average diameter and less than about 140 percent of the average diameter.

8. The collection of particles of claim 1 wherein the collection of particles have a distribution of particle sizes such that at least about 99 percent of the particles have a diameter greater than about 40 percent of the average diameter and less than about 160 percent of the average diameter.

9. A polishing composition comprising a dispersion of aluminum oxide particles of claim 1.

10. The polishing composition of claim 9 wherein the aluminum oxide aluminum oxide has a crystalline structure of $\gamma\text{-Al}_2\text{O}_3$.

11. The polishing composition of claim 9 wherein the polishing composition comprises from about 0.05 percent by weight to about 15 percent by weight aluminum oxide particles.

12. The polishing composition of claim 9 wherein the polishing composition comprises from about 1.0

percent by weight to about 10 percent by weight aluminum oxide particles.

13. The polishing composition of claim 9 wherein the dispersion is an aqueous dispersion.

14. The polishing composition of claim 9 wherein the dispersion is a nonaqueous dispersion.

15. The polishing composition of claim 9 further comprising abrasive particles comprising a composition selected from the group consisting of silicon carbide, metal oxides other than aluminum oxide, metal sulfides and metal carbides.

16. The polishing composition of claim 9 further comprising colloidal silica.

17. A method for producing a collection of aluminum oxide particles having an average diameter from about 5 nm to about 500 nm, the method comprising pyrolyzing a molecular stream in a reaction chamber, the molecular stream comprising an aluminum precursor, an oxidizing agent, and an infrared absorber, where the pyrolysis is driven by heat absorbed from a laser beam.



18. The method of claim 16 wherein the aluminum oxide particles have an average diameter from about 5 nm to about 100 nm.

19. A collection of particles comprising aluminum oxide, the collection of particle having an average

20. The collection of particles of claim 19 wherein the aluminum oxide has a crystalline structure of $\gamma\text{-Al}_2\text{O}_3$.

ABSTRACT OF THE DISCLOSURE

A collection of nanoparticles of aluminum oxide have been produced by laser pyrolysis have a very narrow distribution of particle diameters. Preferably, the distribution of particle diameters effectively does not have a tail such that almost no particles have a diameter greater than about 4 times the average diameter. The pyrolysis preferably is performed by generating a molecular stream containing an aluminum precursor, an oxidizing agent and an infrared absorber. The pyrolysis can be performed with an infrared laser such as a CO₂ laser.

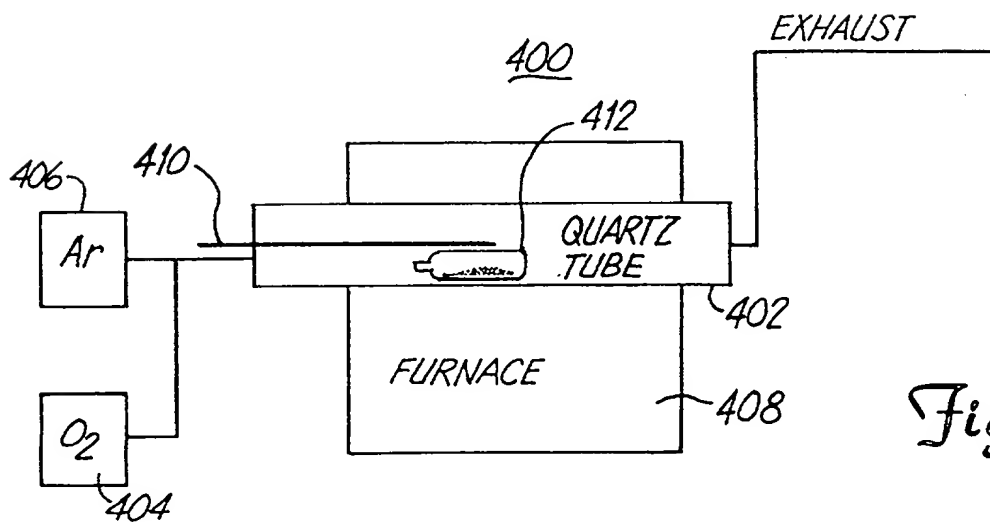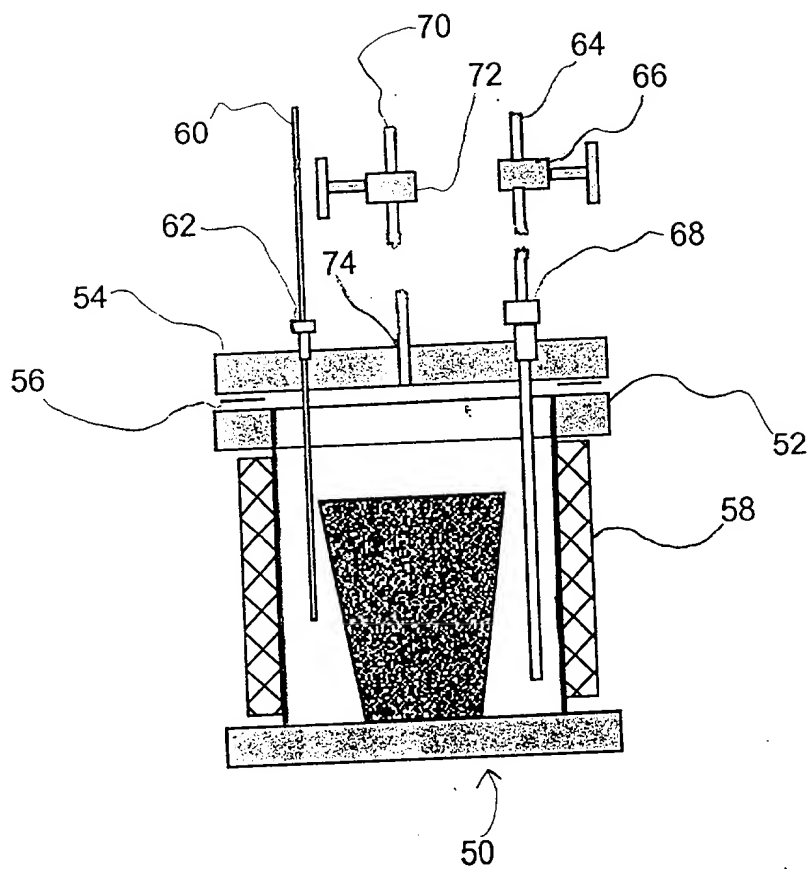

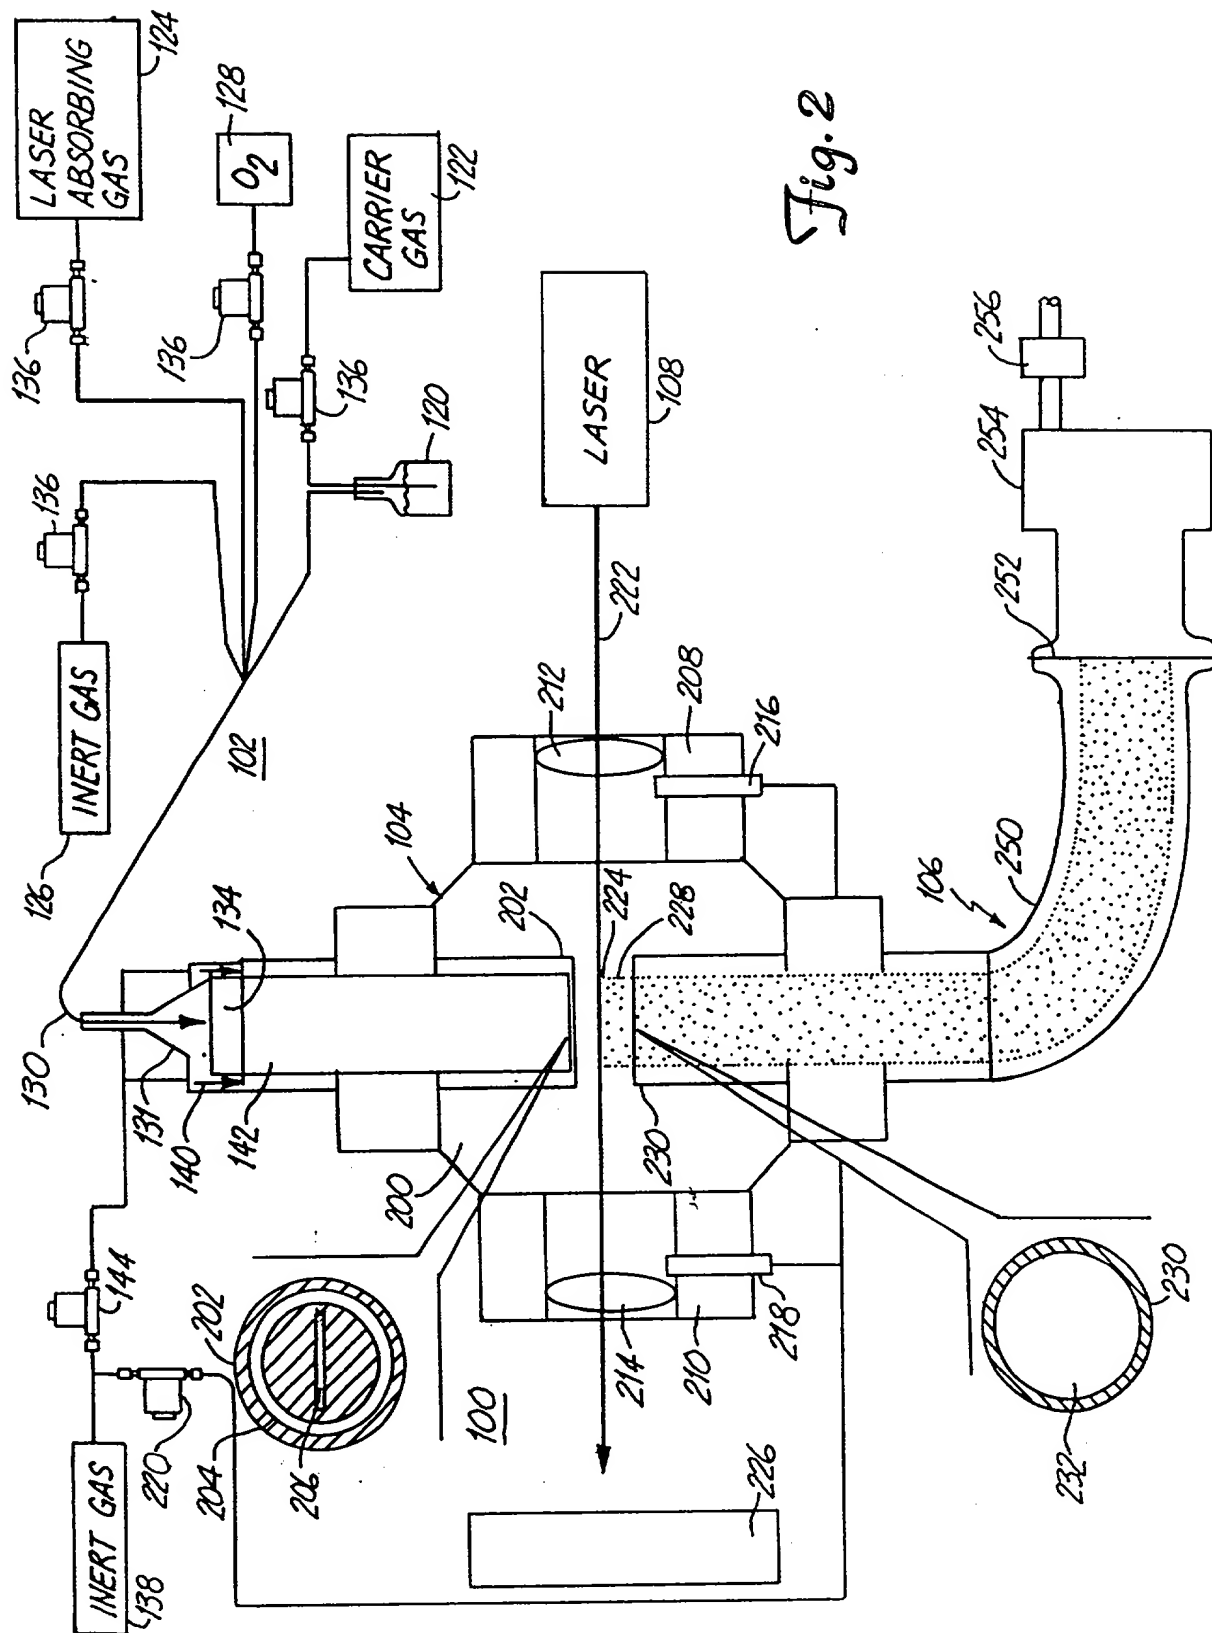


Fig. 2

+

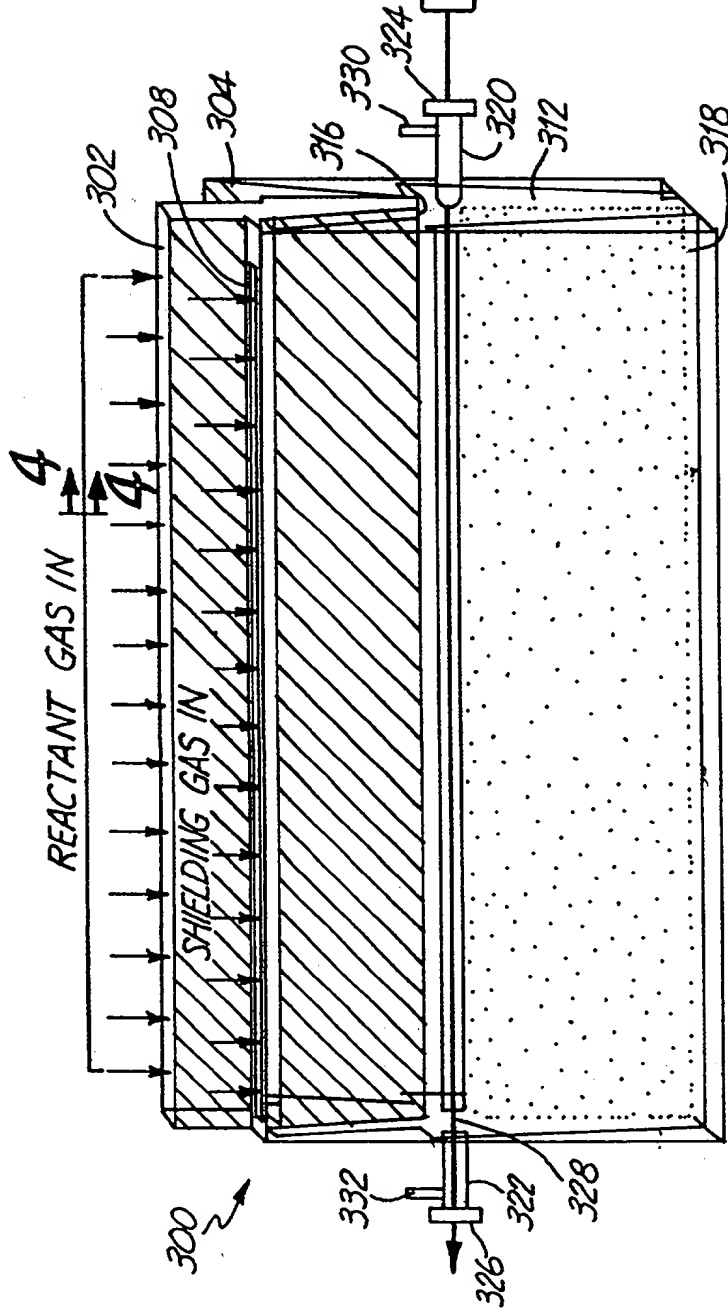


Fig. 3

NANO PARTICLES OUT

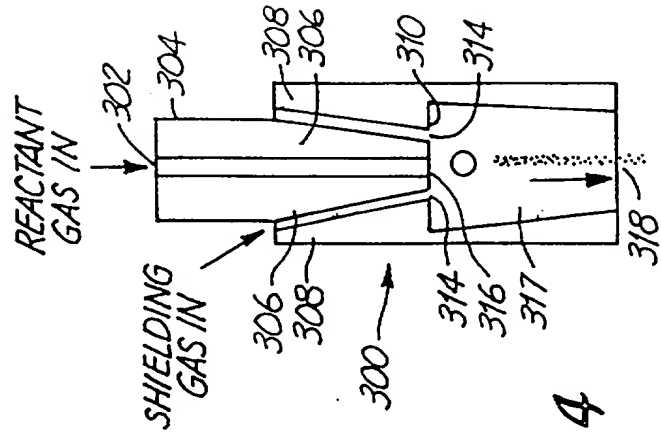


Fig. 4

NANO PARTICLES OUT

+

860T30" E4492F60

Aluminum Oxide

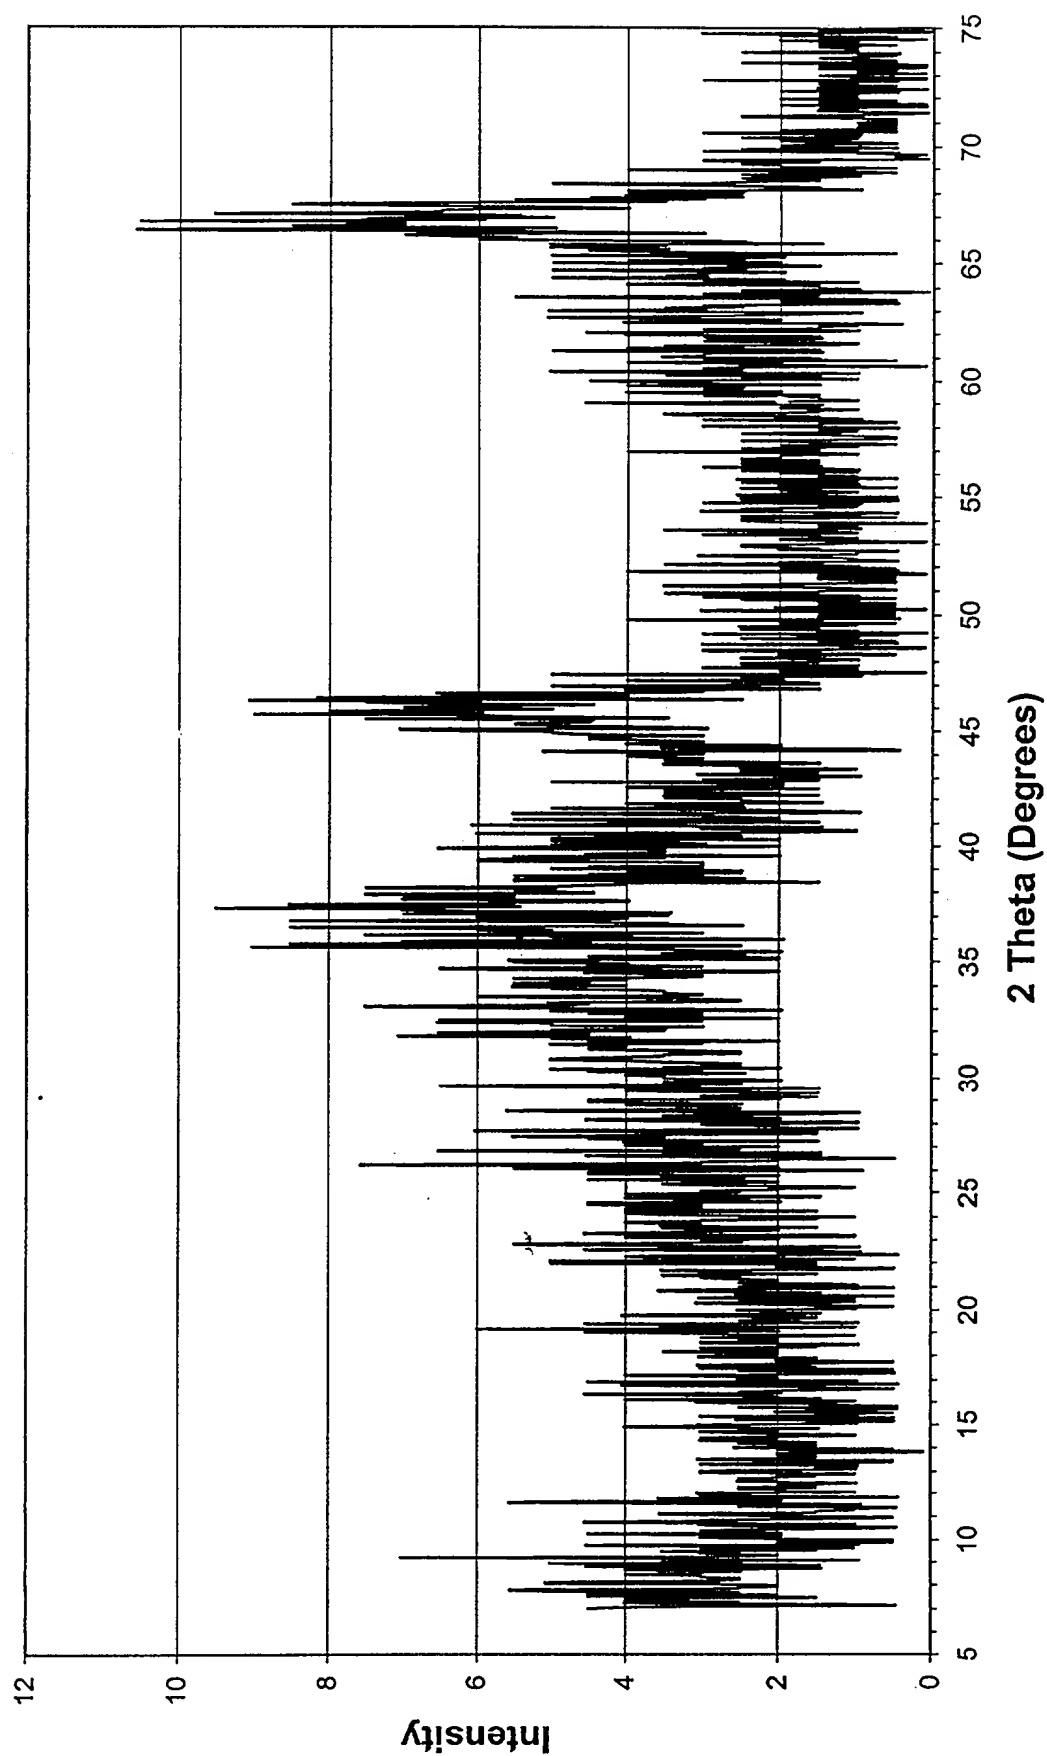


Fig. 6

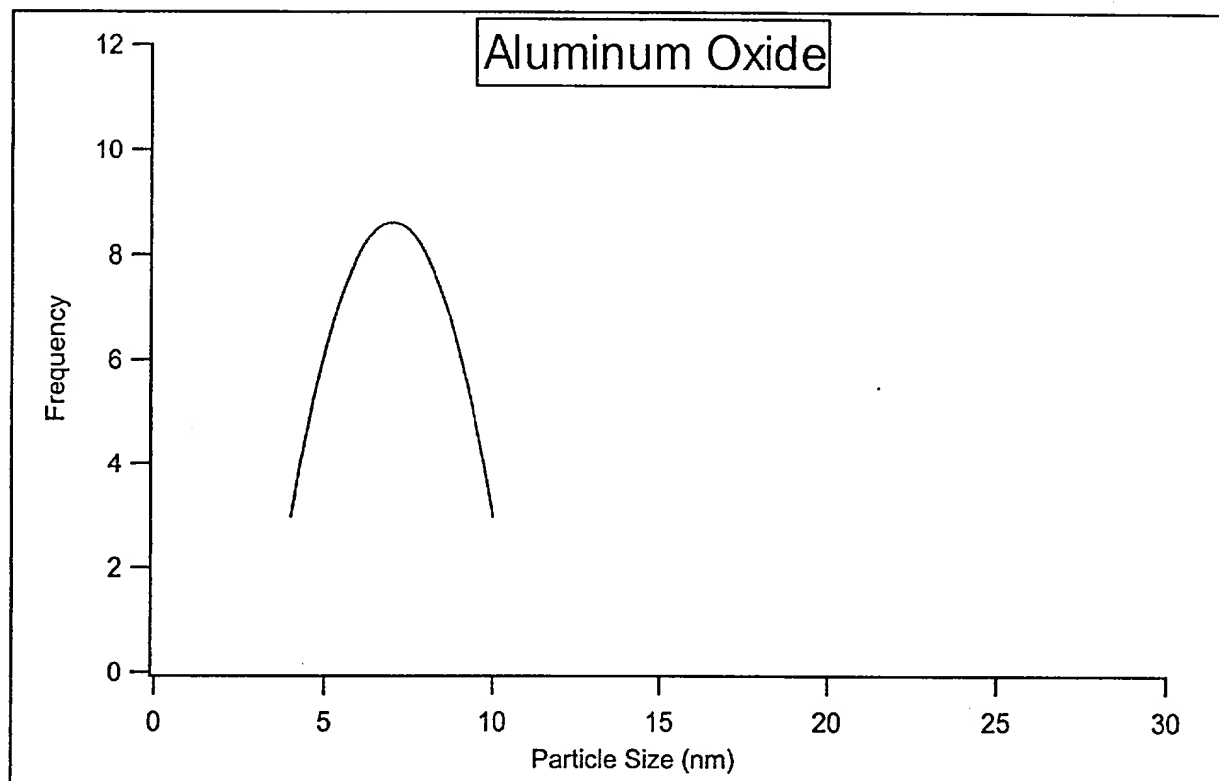


Fig. 8

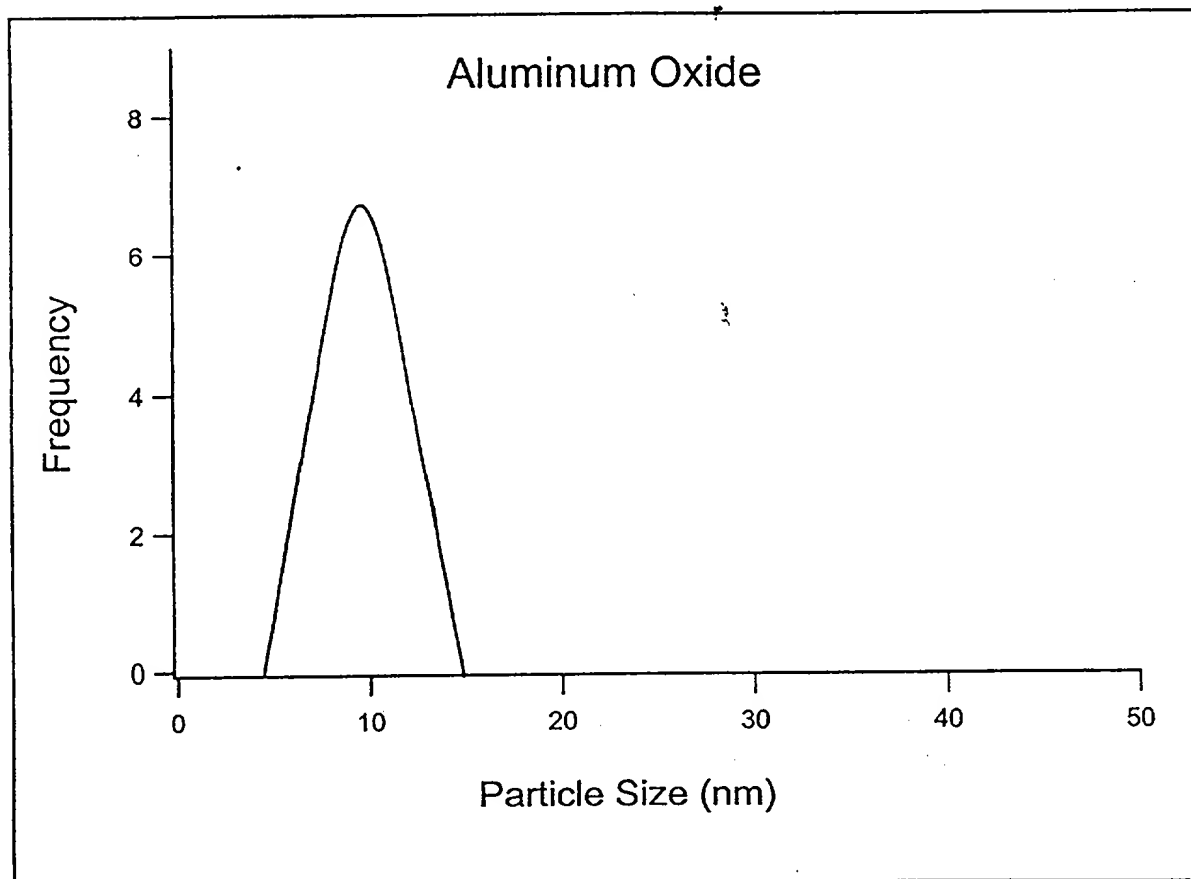


Fig. 11

6067397 E049E.F00

Aluminum Oxide

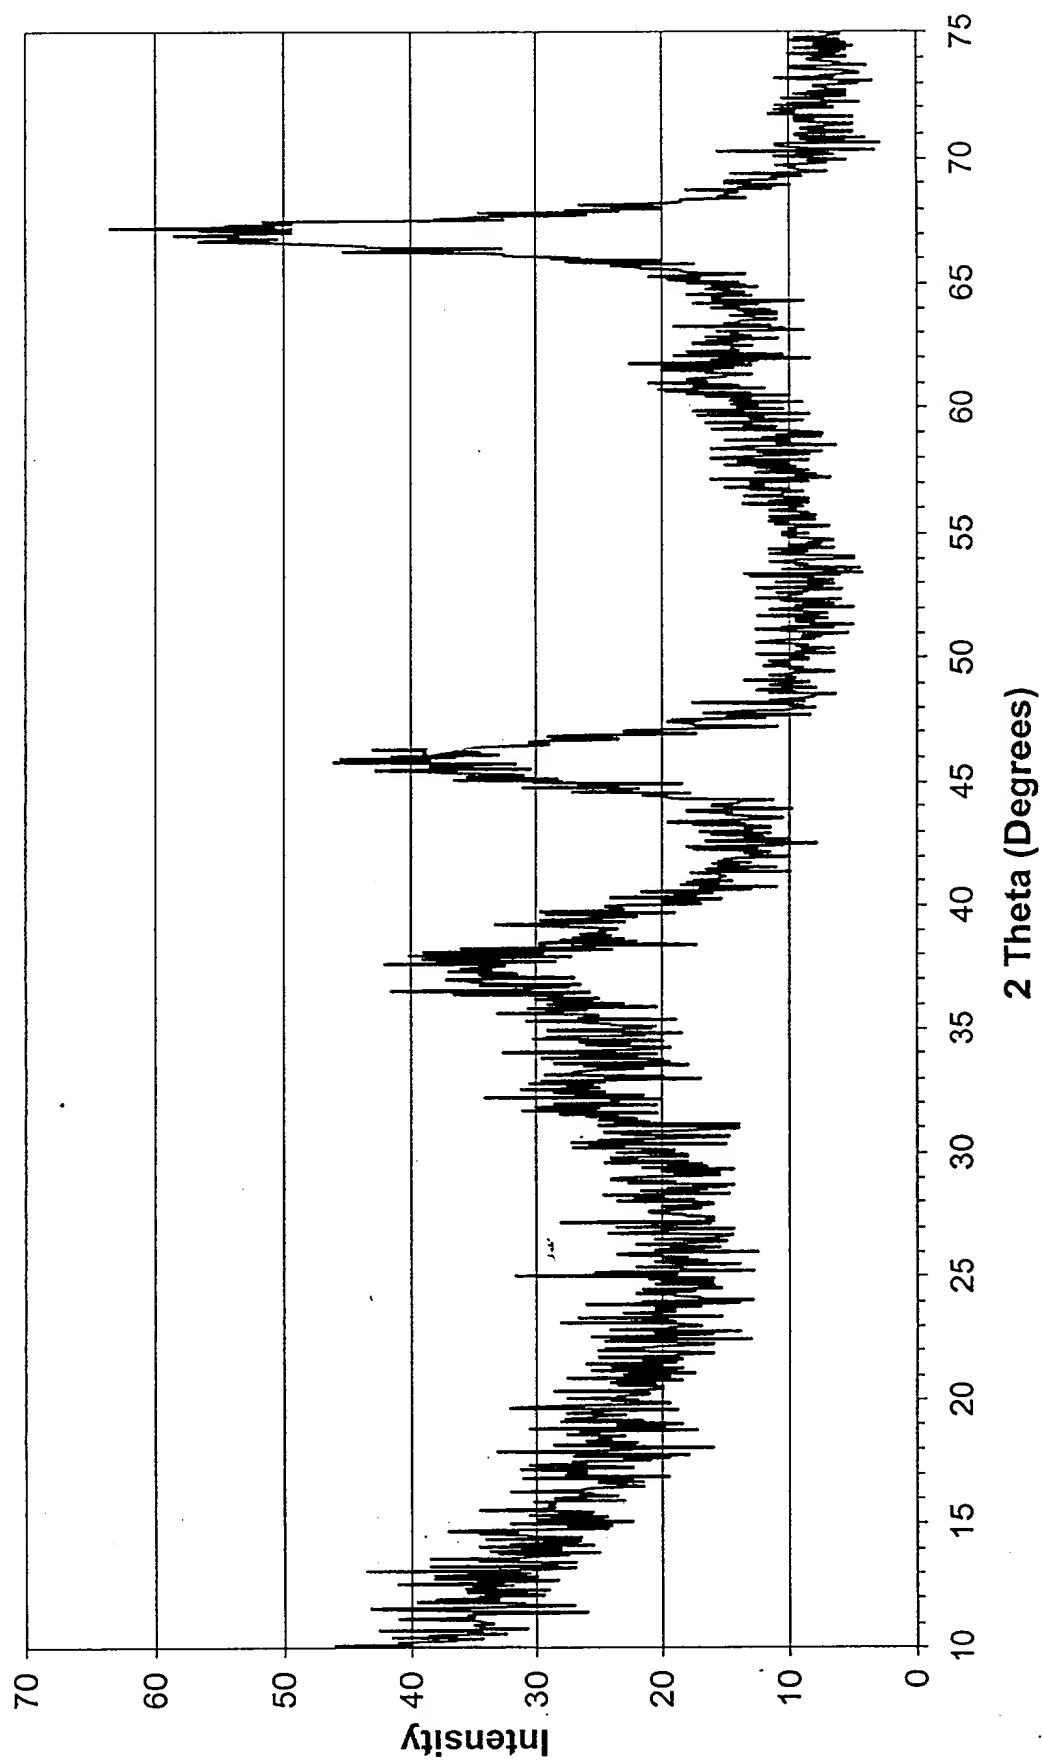


Fig. 9

COMBINED DECLARATION AND
POWER OF ATTORNEY
IN ORIGINAL APPLICATION

Attorney Docket No.

N19.12-0016

SPECIFICATION AND INVENTORSHIP IDENTIFICATION

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and joint inventor of the subject matter which is claimed, and for which a patent is sought, on the invention entitled ALUMINUM OXIDE PARTICLES the specification of which,

(check one) ☒ is attached hereto.

☐ was filed on _____ as Appln. Serial No. .

☐ and was amended on _____

☐ was described and claimed in PCT International Application

No. _____ filed on _____ and as amended under PCT Article

19 on _____

ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is known to me to be material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56.

PRIORITY CLAIM (35 USC § 119)

I claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Number	Country	Day/Month/Year Filed	Priority Claimed
_____	_____	_____	Yes _____ No _____
_____	_____	_____	Yes _____ No _____

PRIORITY CLAIM (35 USC § 120)

I claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below. Insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code § 112, I acknowledge the duty to disclose to the Patent Office all information known to me to be material to patentability as defined in Title 37 Code of Federal Regulations § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Appln. Ser. No.	U.S. Serial No. (if any under PCT)	Filing Date	Status
_____	_____	_____	_____
_____	_____	_____	_____

DECLARATION

I declare that all statements made herein that are of my own knowledge are true and that all statements that are made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY

I appoint the following attorneys and agents to prosecute the patent application identified above and to transact all business in the Patent and Trademark Office connected therewith, including full power of association, substitution and revocation: Judson K. Champlin, Reg. No. 34,797; Joseph R. Kelly, Reg. No. 34,847; Nickolas E. Westman, Reg. No. 20,147; Steven M. Koehler, Reg. No. 36,188; David D. Brush, Reg. No. 34,557; John D. Veldhuis-Kroeze, Reg. No. 38,354; Deirdre Megley Kvale, Reg. No. 35,612; Theodore M. Magee, Reg. No. 39,758; and Peter S. Dardi, Reg. No. 39,650.

I ratify all prior actions taken by Westman, Champlin & Kelly, P.A. or the attorneys and agents mentioned above in connection with the prosecution of the above-mentioned patent application.

DESIGNATION OF CORRESPONDENCE ADDRESS

Please address all correspondence and telephone calls to Peter S. Dardi in care of:

WESTMAN, CHAMPLIN & KELLY, P.A.
Suite 1600 - International Centre
900 Second Avenue South
Minneapolis, Minnesota 55402-3319
Phone: (612) 334-3222 Fax: (612) 334-3312

Inventor: Sujeet Kumar Date: 8/12/08
(Signature)

Inventor: Sujeet Kumar
(Printed Name)

Residence: Fremont, California Citizenship: India

P.O. Address: 39800 Fremont Boulevard #206, Fremont, California 94538

Date: 8-18-98

Inventor: Haroula Dris Reitz
(Printed Name)

Residence: Santa Clara, California

Citizenship: USA

P.O. Address: 2147 Newhall Street #212, Santa Clara, CA 95050

Inventor: _____
(Signature)

Date: 8/18/98

Inventor: Xiangxin Bi
(Printed Name)

Residence: San Ramon, California

Citizenship: People Republic of
China

P.O. Address: 677 Graylyn Drive, San Ramon, California 94583

Inventor: Robert F. Gordon
(Signature)

Date: 8/18/98

Inventor: Nobuyuki Kambe
(Printed Name)

Residence: Menlo Park, California

Citizenship: Japan

P.O. Address: 840 Hobart Street, Menlo Park, California 94025